

blue for greener planet

www.airefengineers.net



AIR WASHERS

Double skin | Evaporative cooling system | Hygienic



Choose your air.

AIR WASHERS

Double skin | Evaporative cooling system | Hygienic



GENERAL DESCRIPTION

These units are highly engineered, effectively designed, thoughtfully manufactured and thoroughly tested evaporative-cooling devices, that are crafted to provide an efficient means of cooling at the least of expense. Designed for compactness and rigid construction, these units are just ideal for any type of residential as well as commercial structures.

RANGE : 2000 CFM to 60000 CFM

CONSTRUCTIONAL FEATURES

FRAME	:	Extruded Aluminum profile and 3D nylon corners etc.
BASE	:	Heavy gauge base frame with cast Al corners
CASING	:	23 ± 2 mm thick, double skin panels made of 0.6 mm sheets with Poly Urethane Foam (PUF) of density 38 ± 2 kg/cu.m injected between the two skins
COOLING PADS	:	Cellulose paper pad 200 mm thick
FILTERS	:	Synthetic, cleanable pre filters
BLOWERS	:	AMCA certified DIDW type, centrifugal blowers, Common-rail base for blower-motor assembly on vibration isolation pads
MOTORS	:	TEFC type, Three phase motors of standard make
MOTOR STAND	:	Adjustable motor-mounting fixture
PULLEYS	:	Adjustable Taper-Bush type pulleys
PUMPS	:	Monoblock / Submersible pumps of standard make
SUMP	:	GSS tank with socket connections for water-in, overflow and drain complete with ball-cock valve etc.
CANVAS CONNECTION	:	Flexible connection to isolate blower from unit body

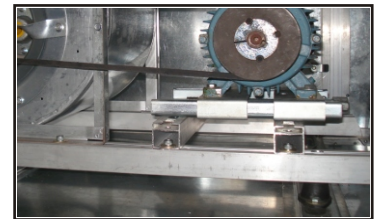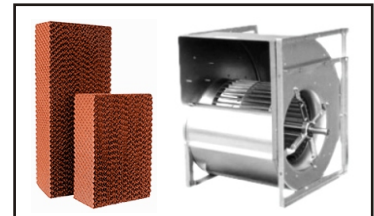

CHARACTERISTICS

DOUBLE SKIN CASING	:	Higher efficiency and low noise
VIBRATION ISOLATORS	:	The units are provided with blower-motor assembly mounted on vibration isolators to make the units vibration free.
VIEW PORT	:	Viewing glass is provided for easier inspection without opening the door.
GASKET SEALED PANELS	:	Low leakage and quiet operation is ensured by using high quality gasket to seal the panels, doors etc.
ADJUSTABLE MOTOR STAND	:	The belt tension can be easily adjusted by screwing or unscrewing the bolt provided on the motor stand.
FLEXIBLE CONNECTION	:	High quality canvas connections prevent vibrations to be carried over From the blower to the unit body.
ADJUSTABLE DRIVE SET	:	Taper lock system in pulleys impart easier fitment and maintenance capabilities to the them.

CELLULOSE PADS : The cross-sectional pads, specially treated flute media, are used in evaporative cooling units and are capable of absorbing and retaining water to provide maximum cooling efficiencies. Pads are cross-corrugated to maximize the mixing of air and water and eliminate the excess water carried over.

APPLICATIONS : Large spaces such as auditoriums, banquets, poultry farms, packing halls, schools, residences etc.
Heat generating areas such as production floors, generator rooms, commercial kitchens etc.

OPTIONAL : S.S. Sump, Limit Switch etc.



Choose your air.

Airef Engineers

570, Industrial Area, Phase - 9, Mohali - 160062, Punjab, India
T: 0172 2232580 M: 9814178328, 9872924004, 9814636328
e mail: mail@airefengineers.net Website: www.airefengineers.net